

ITWULCO.™



Two pullers in one Hi speed 5K / 10K Hi Torque

Industry's First 6 Yr. Warranty

Faster

- 4 Speed dual capstan
- 9' & 18' (per min.) on low speed, 20' & 40' on high speed
- Quickly change from side pull to overhead, underground or truck hitch
- No gang box of parts
- Adjustable counter-balance for easy setup and a 15 lb. working weight
- Pulls out 10 feet of extra wire
- Universal adapter - Use the conduit adapters on heavier pulls



Flashlight Holder



Low Torque - 5K Pulls

Safer

- No anchoring required
- Easy to transport
- Ergonomic balance point
- Telescoping
- User stands to the side during pulls
- Easily maneuvers into tight spaces
- Length (fully extended) 10'6"
- Width 30"

High Torque - 10K Pulls



Smarter


- Open front conduit adapters allow for easy removal at the end of the pull from the top, eliminating the need for any disassembly to pull additional wire
- Super duty puller will perform on every wire pull
- No disassembly, fully self-contained
- Pivoting arm for easy rope access on overhead applications
- Interchangeable components for adaptability on the job site
- Recommended low stretch pulling rope size 5/8" or larger, many use 3/4" or 7/8", minimum breaking strength 15,000 lb.
- Easily extend boom with 2.5" rigid conduit

Includes

- Cannon 10K TM cable puller (total weight 282 lbs.)
- Universal adapter - for loads under 5,000 lb.
- 5 Conduit adapters sizes 2" through 4" (5" & 6" available)
- Milwaukee 20 amp, 2 speed clutched motor (5 year factory warranty on motor)
- Foot switch (UL listed)

Accessories

- PC01- Pull Comms: Hands free noise cancelling head sets with case
- Pull Rope designed for faster wire pulling
- NOTE: Patent Pending

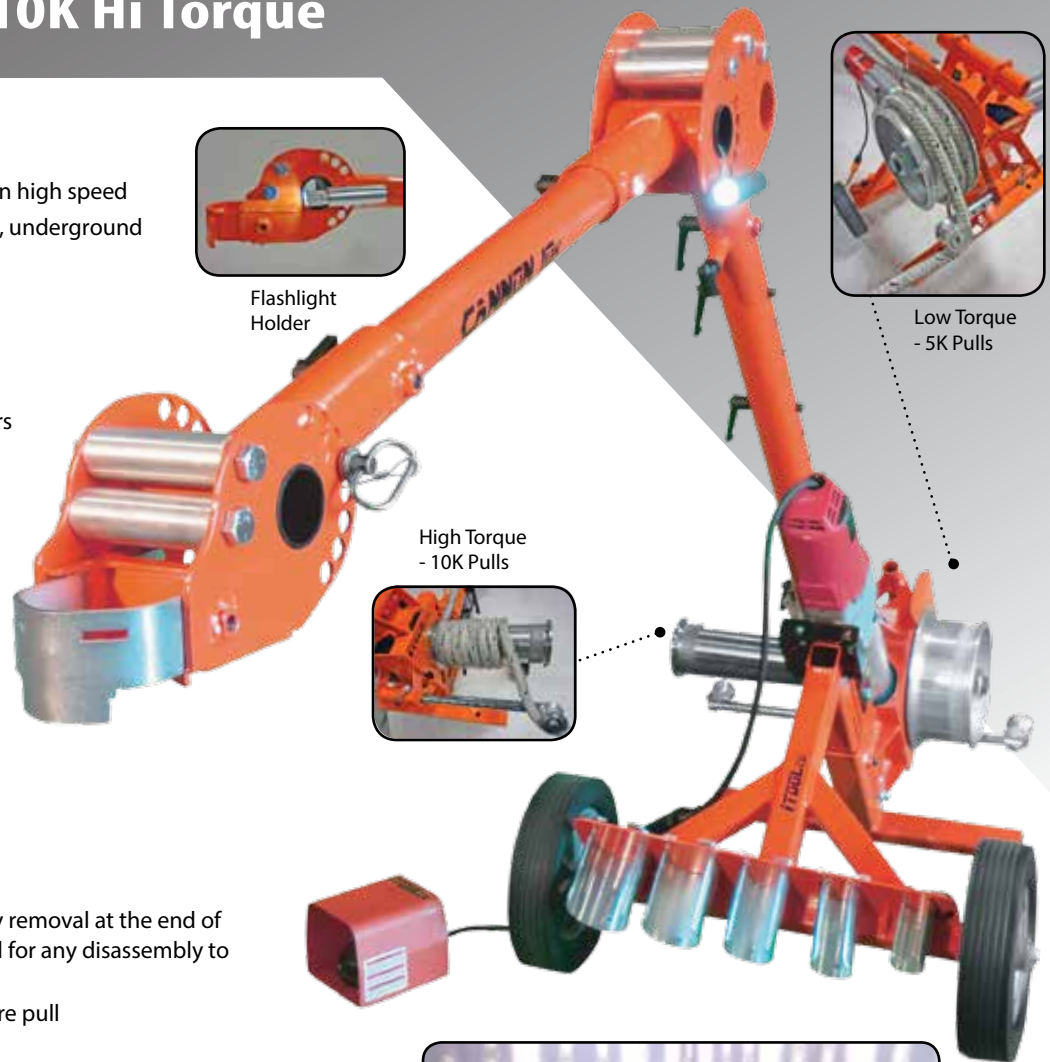

Extension Available



CANNON 6K™ ----- C6K

Industry's First 6 Yr. Warranty

Two pullers in one
Hi speed 3K / 6K Hi Torque

FASTER


Two pullers in one 3K / 6K
4 Speeds with dual capstans
6000 Lb pulling capacity
8' & 28' on low speed, 20' & 70' on high
Universal adapter, for pulls under 4000 lbs.

SAFER

No anchoring required
Easy to transport - use on or off of the cart
Use in a truck receiver hitch

SMARTER

Cannons perform on every wire pull
Self-contained, no gang box of parts
Pivoting head for easy adjustment on
underground, overhead or side pulls
Easy adapter access on all applications
Swivel lock hitch pins (no hairpin)
with flashlight

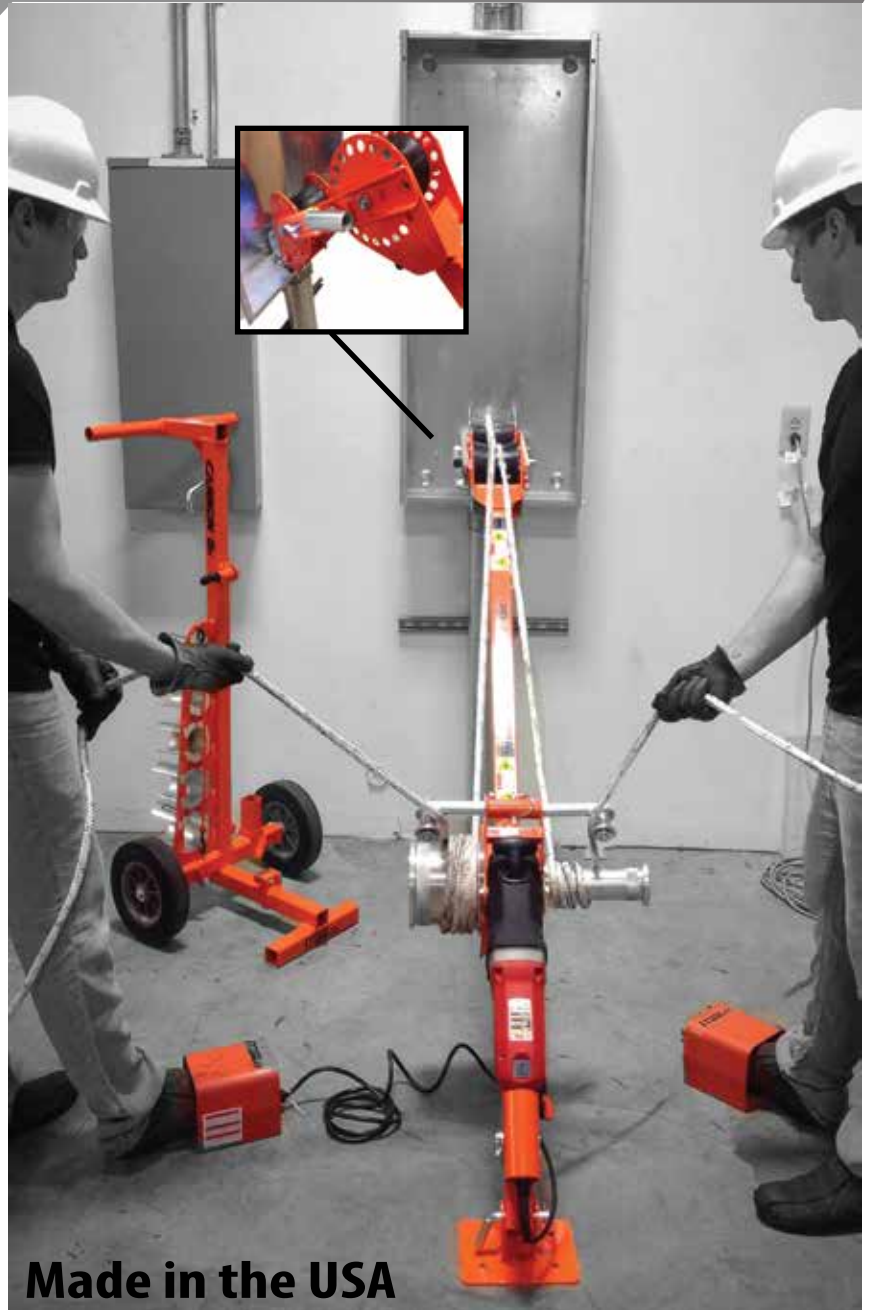

Under Gear



Overhead



On The Cart



Cord Keeper



Made in the USA

C6K - INCLUDES

- Cannon 6K™ cable puller (weight 115 lbs. including the motor)
 - Super duty cart with adapters (weight 48 lbs.)
 - Foot switch (UL listed)
 - No assembly required (Ships boxed & ready to use)
 - Universal adapter
 - 5 conduit adapters 2" through 4" (5" & 6" Available)
 - Motor - Milwaukee 1680-20 power motor, 2 speed, 13 Amp, field replaceable, with a 5 year factory warranty
- Patent Pending

REAL TACKS™



RJ6K

FEED WIRE

THE EASY WAY

REAL TACKS™

- From 2' thru 5.5' diameter
- No lifting of reels or additional tools needed
- 6,000 lb. capacity
- Keeps reels captive - They can't fall off
- Also accommodates up to 1-5/8" solid axles
- Easily adjustable on unlevel surfaces
- Only 35 lbs. each and well balanced
- Each set has 4/ea. 20,000 lb. rated bearings



Compartmentalized Steel Reels



Item	Part #	Description
2" x 5'	AX01 (std)	High chromium axle rated at 6,000 lbs.
2" x 6'	AX02	High chromium axle rated at 6,000 lbs.
1-1/2" x 6'	AXS01	1045 Shaft Steel solid axles

AXLE

Patent Pending

GEAR PUNCH™



Industry's First 6 Yr. Warranty




Fast & Easy With a Cordless Drill

Stainless Steel Rated

- Gear Punch, SS 10 ga. Rated**
- Knock - Outs 1/2" through 6"**
- Draw Studs (Lifetime Warranty)**
- Step Bits Helical TiAn Coated**
- Nut Drivers**
- Center Point K-O Layout Tool**
- 60 Times Faster than a Tape Measure**

Great kits to choose from

- GP122 - 1/2" - 2" Kit**
- GP123 - 2-1/2" - 4" Kit**
- GP124 - 1/2" - 4" Kit**
- GP156 - 5" - 6" Kit**
- GP126 - 1/2" - 6" Best Value Kit**

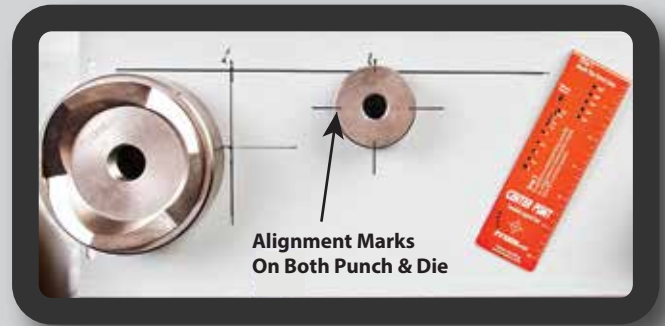

Alignment Marks
On Both Punch & Die

**Quickly Lay Out and
Punch the Knock - Outs**



Patent Pending

ITool Co. **PULLSLICK**™

STRENGTH

- ☒ High tensile strength: 32,000 lbs.
- ☒ 12 strand single braided polyethylene fiber
- ☒ Pound for pound stronger than steel
- ☒ Ultra low stretch

SPEED

- ☒ 25% Reduction in coefficient of friction compared to traditional pulling rope
- ☒ 2/3 lighter weight than traditional pulling rope

CONVENIENT

- ☒ Need only one size rope (9/16") for pulls up to 10,000 lbs.
- ☒ Does not absorb water
- ☒ Dual factory installed pulling eyes

DURABLE

- ☒ Abrasion resistance for less fray
- ☒ Not affected by water, humidity and weather
- ☒ Will not rot; no organics in rope
- ☒ UV resistant

LIGHT WEIGHT

- ☒ 300' Spool: 26 lbs.
- ☒ 600' Spool: 52 lbs.
- ☒ 900' Spool: 77 lbs.
- ☒ 1200' Spool: 103 lbs.



Accessories

Pulling Line Swivels

- SW-158 (10K Lbs.)
- SW-125 (8K Lbs.)



☒ Item	Part #	Dia. (IN)	Circ.(IN)	Length		Total Wt.
1/4" x 300'	PS14-300	1/4 "	0.75"	300'	7,500 Lbs.	6.5 Lbs.
9/16" x 300'	PS916-300	9/16"	1.75"	300'	32,000 Lbs.	26 Lbs.
9/16" x 600'	PS916-600	9/16"	1.75"	600'	32,000 Lbs.	52 Lbs.
9/16" x 900'	PS916-900	9/16"	1.75"	900'	32,000 Lbs.	77 Lbs.
9/16" x 1200'	PS916-1200	9/16"	1.75"	1200'	32,000 Lbs.	103 Lbs.

PULLING ACCESSORIES

10K Receiver Hitch
& Bolt Down Adapter
C10K-422



Pulling Line Swivels
SW-158 (10K Lbs.)
SW-114 (6K Lbs.)



Foot Switch
20Amp
SP-130



Force Gauge
FG10



CURA ROLLER™
Part # ---- CR05

Patent Pending



Feeding



Pull an LB



PULL - COMM™ PC01

A better and more affordable way to communicate in noisy environments. The headsets combine hearing protection and 2-way radio communications. Eight pre-programmed channels. Hearing protection with a Noise Reduction Rating of 25 dB. Convenience features include deep earcup design and wide, softly-padded headband. Ghost voicing mode control and VOX and PTT radio transmit.



▲ Real-Time Pulling Communication ▲
Between Pulling and Feeding Ends

CONDUIT SHEAVES™

for Feeding or Pulling
Lock in Place (LIP)
in any Direction

Size	Part #
2"	- CS20
2.5"	- CS25
3"	- CS30
3.5"	- CS35
4"	- CS40
5"	- CS50
6"	- CS60

OVERHEAD



Patent Pending





Video Demo



Smarter

Jack up, transport, and power feed any wire (no lifting)
 Match speeds with iToolco Cannon 10K Puller
 Light weight and wheeled for easy maneuvering
 Adjustable size to fits any spool from 22" to 72" diameter
 2,500 lb. Load capacity 5000 lb. when used with the Real Jacks.

Faster

Variable speed 0 to 200 feet per minute
 Rolls into place for an easy set-up

Safer

No anchoring needed
 Axle-less, won't tip over
 No lifting heavy wire spools

Specifications

Weight capacity 2,500 lb.
 Spool diameters 22" to 72"
 Spool types: wood, plastic,
 Foot switch (UL listed)
 Drive side
 - Width 19"
 - Length 44" to 64-1/2"
 - Height 10-1/2"
 - Weight 67 lbs.
 Free spinning side
 - Width 15-1/2"
 - Length 44" to 64-1/2"
 - Height 10-1/2"
 - Weight 48 lbs.

NOTE: Patent Pending



Real Jacks & Power Feeder
 Shown In-Use



**3081 Horseshoe Bend Ln.
 Knoxville, TN 37931
 PH (865) 670-3713
 itoolco.com**



Easier

Easy to set up
 and transport
 Light and
 maneuverable
 - 38 lbs.
 Easy one person
 operation
 Horizontal or
 vertical use

Faster

Saves time
 Crank handle for
 faster re-spooling

Safer

Prevents injuries
 from lifting and
 handling rope
 No more lifting
 heavy wire spools

Smarter

Axle-less technology
 Multi-directional
 Rolls over rough terrain
 Rope are (high & dry)

Specifications

Length, handle compacted,
 49", handle extended 60"
 Width, 23"
 Weight, 38 lbs.
 Spool widths,
 12"-35"
 Spool diameters,
 12"-32"
 300 lb.
 Weight limit
 NOTE:
 Patent Pending

Spool and
 un-spool
 rope easily



Conveniently
 store and move
 Real Jacks on the
 Rope Tender

Accessory

REAL SPOOL™

Durable steel
 Holds up to
 300 lbs. of rope
 Works great w/
 Rope Tender &
 Pull Slick
 Light - 30 lbs.
 No splinters
 Keeps rope snag
 free & dry



RS01



Great for MC Cable