


# Hangers

---



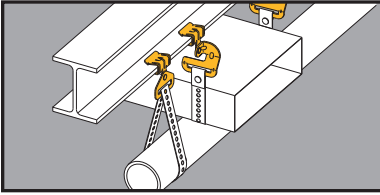

- Suspends straps thru 1 1/2" wide from beam flanges 1/8" to 3/4" thick.
- Suspends straps parallel or at right angles to beams.
- Simply installed with a hammer.
- Static Load Capacity: 200 Lbs.

## Strap Hangers




Parallel



Right Angle

UPC/Part Number	Catalog Number	Description	Flange Thickness	Box Qty.
78101104930	<b>BHE-1-2</b>	Parallel	1/16" to 1/8"	100
78101118870	<b>BH-2-4</b>	Parallel	1/8" to 1/4"	100
78101118880	<b>BH-5-8</b>	Parallel	5/16" to 1/2"	100
78101118890	<b>BH-9-12</b>	Parallel	9/16" to 3/4"	100
78101104115	<b>BH-1-2-R</b>	Right Angle	1/16" to 1/8"	100
78101118875	<b>BH-2-4-R</b>	Right Angle	1/8" to 1/4"	100
78101118885	<b>BH-5-8-R</b>	Right Angle	5/16" to 1/2"	100
78101118895	<b>BH-9-12-R</b>	Right Angle	9/16" to 3/4"	100

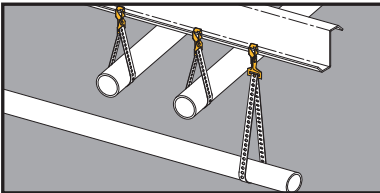

"Z" Purlin Hangers



.281" Ø

BH-H7



BH-F12




BH-F12-R

UPC/Part Number	Catalog Number	Description	Box Qty.
78101103385	<b>BH-F12</b>	Right Angle	100
78101103384	<b>BH-F12-R</b>	Parallel	100
78101119922	<b>BH-H7</b>	Parallel	100

Read safety/installation instruction sheets in packages before use.

# Hangers

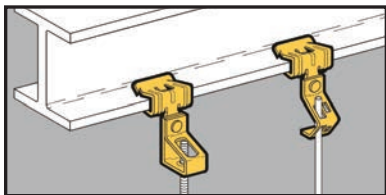

- Suspend wire or plain and threaded rod from beam flanges 1/8" to 3/4" thick.
- Simply installed with a hammer.
- Static Load Capacity: 160 Lbs.

## Rod To Beam Hangers



UPC/Part Number	Catalog Number	Flange Thickness	Description	Box Qty.
78101118900	<b>BH1-E-2-4</b>	1/8" to 1/4"	#8 Wire or 1/4" Plain Rod	100
78101118905	<b>BH1-E-5-8</b>	5/16" - 1/2"	#8 Wire or 1/4" Plain Rod	100
78101118910	<b>BH1-E-9-12</b>	9/16" - 3/4"	#8 Wire or 1/4" Plain Rod	100

UPC/Part Number	Catalog Number	Flange Thickness	Plain Rod Size	Box Qty.
78101118940	<b>BH2-E-2-4</b>	1/8" to 1/4"	3/8"	100
78101118945	<b>BH2-E-5-8</b>	5/16" - 1/2"	3/8"	100
78101118950	<b>BH2-E-9-12</b>	9/16" - 3/4"	3/8"	100

## Rod To Beam Hangers



With Thread Impression




UPC/Part Number	Catalog Number	Flange Thickness	Threaded Rod Size	Box Qty.
78101118980	<b>BH4-E-2-4</b>	1/8" to 1/4"	1/4"	100
78101118985	<b>BH4-E-5-8</b>	5/16" - 1/2"	1/4"	100
78101118990	<b>BH4-E-9-12</b>	9/16" - 3/4"	1/4"	100
78101119060	<b>BH6-E-2-4</b>	1/8" to 1/4"	3/8"	100
78101119065	<b>BH6-E-5-8</b>	5/16" - 1/2"	3/8"	100
78101119070	<b>BH6-E-9-12</b>	9/16" - 3/4"	3/8"	100

Note: BH4 and BH6 have thread impressions.

UPC/Part Number	Catalog Number	Flange Thickness	Threaded Rod Size	Box Qty.
78101119020	<b>BH5-E-2-4 *</b>	1/8" to 1/4"	1/4" to 3/8"	100
78101119025	<b>BH5-E-5-8 *</b>	5/16" - 1/2"	1/4" to 3/8"	100
78101119030	<b>BH5-E-9-12 *</b>	9/16" - 3/4"	1/4" to 3/8"	100

\*Nuts Required.

# Hangers

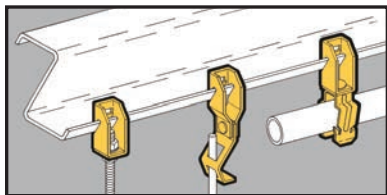

## "Z" Purlin Hangers

BF13



BF12



- Compensates for angle of purlin lip.
- Allows for parallel conduit runs or vertical support drops.
- Riveted fasteners will rotate 360°.
- Maximum Purlin thickness of  $\frac{3}{32}$ ".

UPC/Part Number	Catalog Number	Description	Static Load Cap. Lbs.	Box Qty.
78101118345	<b>BF13</b>	With $\frac{1}{4}$ " Hole	100	100
78101118340	<b>BF12</b>	For "S" Hooks	100	100



**Guide-Rite™**  
Fastener  
BG Series



Push-Type  
BP Series

UPC/Part Number	Catalog Number	Conduit Size EMT & Rigid	Static Load Cap. Lbs.	Box Qty.
78101118445	<b>BG-6-F13 *</b>	$\frac{3}{8}$ "	100	100
78101118520	<b>BG-8-12-F13</b>	$\frac{1}{2}$ ", $\frac{3}{4}$ "	100	100
78101118590	<b>BG-16-F13</b>	1"	100	100
78101118675	<b>BG-20-F13</b>	$1\frac{1}{4}$ "	100	100
78101119290	<b>BP-8-F13</b>	$\frac{1}{2}$ " EMT	25	100
78101119390	<b>BP-12-F13</b>	$\frac{3}{4}$ " EMT $\frac{1}{2}$ " IMC, Rigid	25	100
78101119480	<b>BP-16-F13</b>	1" EMT $\frac{3}{4}$ " IMC, Rigid	25	50

\* BG-6 will accept the following range  $\varnothing.420 - \varnothing.675$ :  
 $1\frac{1}{2}$  thru  $10\frac{1}{4}$  MC/AC cable and  $\frac{5}{16}$  or  $\frac{3}{8}$  flexible conduit

Read safety/installation instruction sheets in packages before use.

## Universal Beam Fasteners




UPC/Part Number	Catalog Number	Description	Static Load Cap.	Box Qty.
78101118920	<b>BH1-F12</b>	#8 Wire or 1/4" Plain Rod	100 Lbs.	100
78101118960	<b>BH2-F12</b>	3/8" Plain Rod	100 Lbs.	100



UPC/Part Number	Catalog Number	Threaded Rod Size	Static Load Cap.	Box Qty.
78101119000	<b>BH4-F12</b>	1/4"	100 Lbs.	100
78101119080	<b>BH6-F12</b>	3/8"	100 Lbs.	100
78101119040	<b>BH5-F12 *</b>	1/4" & 3/8"	100 Lbs.	100

\*Nuts Required.

Note: BH4 and BH6 have thread impressions.

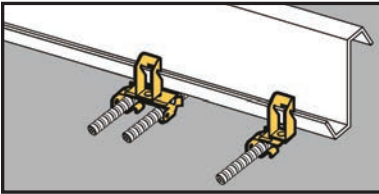

## Cable To "Z" Purlin Flange Hangers

- Compensates for angle of purlin lip.
- Attaches MC, AC, sizes 14/2 through 10/3 or 3/8" FMC to "Z" Purlins up to 3/32" thick.
- Fastener will rotate 360°.
- Simply installed with a hammer.




BX4M-F13



UPC/Part Number	Catalog Number	Description	Flange Thickness	Box Qty.
78101101188	<b>BX4-F13</b>	Single Runs	Thru 3/32"	100
78101101204	<b>BX4M-F13</b>	Double Runs	Thru 3/32"	100

Read safety/installation instruction sheets in packages before use.

# Hangers

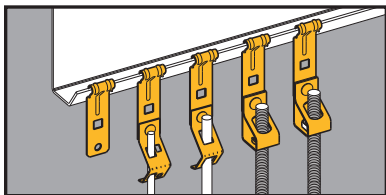

## "Z" Purlin Flange Hangers

- Suspend wire, or plain and threaded rod from "Z" Purlins.
- Fits "Z" Purlins 1/16" to 1/4" thick.
- Simply installed with a hammer.
- Static Load Capacity: 160 Lbs.



UPC/Part Number	Catalog Number	Description	Box Qty.
78101104271	BF4	For "S" Hooks, Bolting Straps and Wrap Wire	100

## "Z" Purlin Flange Hangers



UPC/Part Number	Catalog Number	Description	Box Qty.
78101104274	<b>BH1-F4</b>	#8 Wire or 1/4" Plain Rod	100
78101104276	<b>BH2-F4</b>	3/8" Plain Rod	100




UPC/Part Number	Catalog Number	Threaded Rod Size	Box Qty.
78101104286	<b>BH4-F4</b>	1/4"	100
78101104280	<b>BH6-F4</b>	3/8"	100
78101104278	<b>BH5-F4 *</b>	1/4" - 3/8"	100

\* Nuts required.

Note: BH4 & BH6 have thread impressions.

# Hangers

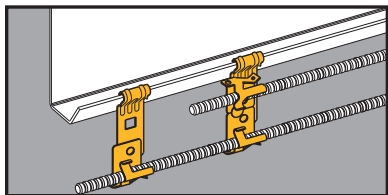

- Attaches MC, AC, sizes 14/2 thru 10/3 or 3/8" FMC to "Z" Purlins.
- Fits "Z" Purlin flanges 1/16" to 1/4" thick.
- Fastener will rotate 360°.

## Cable To "Z" Purlin Flange Hangers




UPC/Part Number	Catalog Number	Description	Box Qty.
78101104931	<b>BX4-F4</b>	Single Runs	100

These products are designed for positioning only. No load rating.



UPC/Part Number	Catalog Number	Description	Box Qty.
78101104932	<b>BX4M-F4</b>	Double Runs	100

These products are designed for positioning only. No load rating.

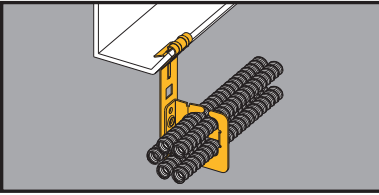

## MC/AC Cable Carrier to 'Z' Purlin Flange Hanger


- Secures and supports multiple runs of MC/AC cable to 'Z' purlins.
- Effectively organizes cables and eliminates derating issues.
- Retention tab is open for easy loading and unloading and contains cables when bent in place.
- Load Capacity: 50 lbs.



UPC/Part Number	Catalog Number	Cable Diameter & Number of Runs	Box Qty.
78205144084	<b>BRC51-F4</b>	.430" to .560" Up to 4 Runs	25
78205144085	<b>BRC52-F4</b>	.430" to .560" Up to 9 Runs	25
78205144086	<b>BRC53-F4</b>	.560" to .690" Up to 7 Runs	25

Read safety/installation instruction sheets in packages before use.

# Hangers

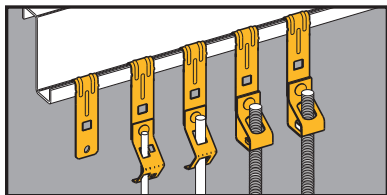

- Suspend wire, or plain and threaded rod from vertical flanges.
- Fits vertical flanges 1/16" to 1/4" thick.
- Static Load Capacity: 160 Lbs.

## Vertical Flange Hangers



UPC/Part Number	Catalog Number	Description	Box Qty.
78101104270	BF3	For "S" Hooks, Bolting Straps and Wrap Wire	100

## Vertical Flange Hangers



UPC/Part Number	Catalog Number	Description	Box Qty.
78101104273	<b>BH1-F3</b>	#8 Wire or 1/4" Plain Rod	100
78101104275	<b>BH2-F3</b>	3/8" Plain Rod	100




4 1/4"  
Overall Height

UPC/Part Number	Catalog Number	Threaded Rod Size	Box Qty.
78101104285	<b>BH4-F3</b>	1/4"	100
78101104279	<b>BH6-F3</b>	3/8"	100
78101104933	<b>BH5-F3 *</b>	1/4", 3/8"	100

\* Nuts required.

Read safety/installation instruction sheets in packages before use.

# Hangers

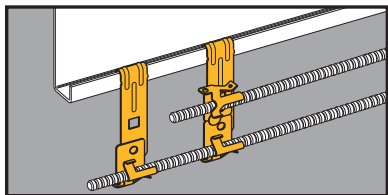

## Cable To Vertical Flange Hangers

- Attaches MC, AC, sizes 14/2 through 10/3 or 3/8" flexible conduit FMC to vertical flanges 1/16" to 1/4" thick.
- Fastener will rotate 360°.
- Simply installed with a hammer.




UPC/Part Number	Catalog Number	Description	Box Qty.
78101104281	<b>BX4-F3</b>	Single Runs	100

This product is designed for positioning only. No load rating.



UPC/Part Number	Catalog Number	Description	Box Qty.
78101104282	<b>BX4M-F3</b>	Double Runs	100

This product is designed for positioning only. No load rating.

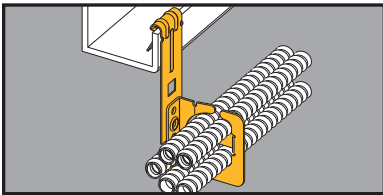


## MC/AC Cable Carrier To Vertical Flange Hanger

- Secures and supports multiple runs of MC/AC cable to vertical flanges.
- Effectively organizes cables and eliminates derating issues.
- Retention tab is open for easy loading and unloading and contains cables when bent in place.
- Load Capacity: 50 lbs.



UPC/Part Number	Catalog Number	Cable Diameter & Number of Runs	Box Qty.
78205144081	<b>BRC51-F3</b>	.430" to .560" Up to 4 Runs	25
78205144084	<b>BRC52-F3</b>	.430" to .560" Up to 9 Runs	25
78205144083	<b>BRC53-F3</b>	.560" to .690" Up to 7 Runs	25

# Hangers

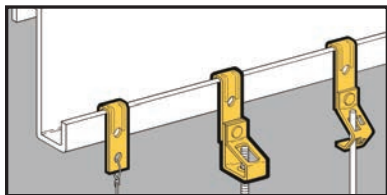

- Suspend wire, or plain or threaded rod from vertical flanges.
- Fits vertical flanges 1/16" to 1/4" thick.
- Static Load Capacity: 160 Lbs.

## Vertical Flange Hangers



UPC/Part Number	Catalog Number	Flange Thickness	Description	Box Qty.
78101118310	<b>BF1</b>	1/16" - 5/32"	For "S" Hooks, Bolting Straps and Wrap Wire	100
78101118315	<b>BF2</b>	5/32" - 1/4"	For "S" Hooks, Bolting Straps and Wrap Wire	100



UPC/Part Number	Catalog Number	Flange Thickness	Description	Box Qty.
78101118915	<b>BH1-F1</b>	1/16" - 5/32"	#8 Wire or 1/4" Plain Rod	100
78101118925	<b>BH1-F2</b>	5/32" - 1/4"	#8 Wire or 1/4" Plain Rod	100

## Vertical Flange Hangers



UPC/Part Number	Catalog Number	Flange Thickness	Plain Rod Size	Box Qty.
78101118955	<b>BH2-F1</b>	1/16" - 5/32"	3/8"	100
78101118965	<b>BH2-F2</b>	5/32" - 1/4"	3/8"	100




UPC/Part Number	Catalog Number	Flange Thickness	Threaded Rod Size	Box Qty.
<b>With Thread Impression</b>				
78101118995	<b>BH4-F1</b>	1/16" - 5/32"	1/4"	100
78101119075	<b>BH6-F1</b>	1/16" - 5/32"	3/8"	100
78101119005	<b>BH4-F2</b>	5/32" - 1/4"	1/4"	100
78101119085	<b>BH6-F2</b>	5/32" - 1/4"	3/8"	100

### With Clearance Hole

78101118995	<b>BH5-F1 *</b>	1/16" - 5/32"	1/4", 3/8"	100
78101119075	<b>BH5-F2 *</b>	5/32" - 1/4"	1/4", 3/8"	100

\* Nuts required.

# Hangers

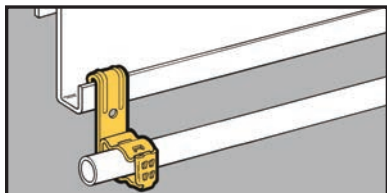

- Supports 3/8" to 1" conduit from vertical flanges 1/16" to 1/4" thick.
- Patented Guide-Rite™ feature ensures fastener will close and lock every time.
- Simply installed with a hammer and pliers.
- Static Load Capacity: 25 Lbs.

## Conduit To Vertical Flange Hangers



**Guide-Rite™**  
Fastener



UPC/Part Number	Catalog Number	Conduit Size	Flange Thickness	Box Qty.
78101119957	<b>BG-6-F1 *</b>	3/8"	1/16" - 5/32"	100
78101119960	<b>BG-6-F2 *</b>	3/8"	5/32" - 1/4"	100
78101119958	<b>BG-8-12-F1</b>	1/2" & 3/8"	1/16" - 5/32"	100
78101119961	<b>BG-8-12-F2</b>	1/2" & 3/8"	5/32" - 1/4"	100
78101119958	<b>BG-16-F1</b>	1"	1/16" - 5/32"	100
78101119961	<b>BG-16-F2</b>	1"	5/32" - 1/4"	100

Patent #4958792


\* BG-6 will accept the following range Ø.420 - Ø.675:  
14/2 thru 10/4 MC/AC cable and 5/16 or 3/8 flexible conduit



UPC/Part Number	Catalog Number	Wire Size	Flange Thickness	Box Qty.
78101103556	<b>BRC3-F1</b>	14/2 & 12/2 With Ground	1/16" - 5/32"	100
78101103557	<b>BRC3-F2</b>	14/2 & 12/2 With Ground	5/32" - 1/4"	100


Note: These products are designed for positioning only. No load rating.

# Hangers

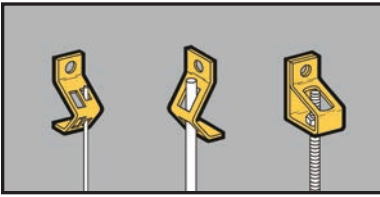

- BH1, BH2: Supports wire or plain rod.
- BH7, BH8: For wire or chain drop from concrete or wood.
- BH4, BH5, BH6 supports 1/4" or 3/8" threaded rod.
- Static Load Capacity: 160 Lbs.


## Components



UPC/Part Number	Catalog Number	Description	Box Qty.
78101118800	<b>BH1</b>	#8 Wire or 1/4" Plain Rod	100
78101118805	<b>BH2</b>	For 3/8" Plain Rod	100

BH4  
BH6

cUL US



UPC/Part Number	Catalog Number	Description	Box Qty.
78101118815	<b>BH4</b>	For 1/4" Threaded Rod	100
78101118825	<b>BH6</b>	For 3/8" Threaded Rod	100
78101118820	<b>BH5 *</b>	For 1/4" & 3/8" Threaded Rod	100

\* Nuts required.

Note: BH4 & BH6 have thread impressions.

BH7

cUL US




BH8

UPC/Part Number	Catalog Number	Description	Box Qty.
78101118830	<b>BH7</b>	Angle Bracket With .281"Ø Holes	100
78101118835	<b>BH7-6</b>	Angle Bracket With .281"Ø & .406"Ø Holes	100
78101118840	<b>BH8</b>	Offset Bracket With .281"Ø Holes	100
78101118845	<b>BH8-6</b>	Offset Bracket With .281"Ø & .406"Ø Holes	100

Read safety/installation instruction sheets in packages before use.

# Hangers

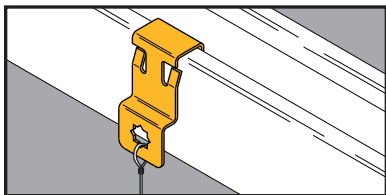

- The BSC4 Series provides a simple, snap-on attachment to strut, eliminating the need for tools and/or drilling during installation.

## Strut Fasteners



- Ideal for retrofit and add-on applications.
- BSC4 provides a 1/4" mounting hole along the side of a standard strut member.
- Riveted assemblies allow for easy attachment of conduit, cable and rod.

UPC/Part Number	Catalog Number	Description	Load Capacity	Box Qty.
78205146573	<b>BSC4</b>	Strut Clip	60 lbs.	100



UPC/Part Number	Catalog Number	Rod Size	Load Capacity	Box Qty.
78205146581	<b>BH4-SC4</b>	1/4"-20	60 lbs.	100
78205146582	<b>BH6-SC4</b>	3/8"-16	60 lbs.	100

# Hangers



BG-SC4



BP-SC4



BL14-SC4

UPC/Part Number	Catalog Number	Conduit Size	Load Capacity	Box Qty.
78205146577	<b>BG6-SC4</b>	MC/AC & 3/8"	25 lbs.	100
78205146578	<b>BG812-SC4</b>	1/2" & 3/4"	25 lbs.	100
78205146579	<b>BP8-SC4</b>	1/2"	15 lbs.	100
78205146580	<b>BP12-SC4</b>	3/4"	15 lbs.	100
78205146588	<b>BL1400-SC4</b>	1/2"	60 lbs.	100
78205146589	<b>BL1410-SC4</b>	3/4"	60 lbs.	100
78205146590	<b>BL1420-SC4</b>	1"	60 lbs.	100



BX4M-SC4




BRC5-SC4

UPC/Part Number	Catalog Number	Cable Size Runs	Load Capacity	Box Qty.
78205146584	<b>BX4M-SC4</b>	14/2 - 10/3 up to 2 runs	–	100
78205146585	<b>BRC51-SC4</b>	.430" to .560" up to 4 runs	50 lbs.	100
78205146586	<b>BRC52-SC4</b>	.430" to .560" up to 9 runs	50 lbs.	100
78205146587	<b>BRC53-SC4</b>	.560" to .690" up to 7 runs	50 lbs.	100

Read safety/installation instruction sheets in packages before use.

# Hangers

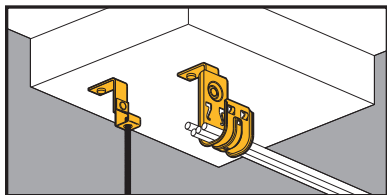

## Drive Pin Fasteners



BPNA



BCH21-PNA  
BCH32-PNA



BH-PNA



BH1-PNA  
BH2-PNA

- Special support bracket allows clearance for powder actuated tools.
- Exclusive 1<sup>1</sup>/<sub>4</sub>" drive pin now pre-installed.
- Pins rated for concrete up to 4000 psi.
- Static Load Capacity: 30 Lbs. unless specified. Limited by fastener assembly. Pin rating must be considered before installation.

UPC/Part Number	Catalog Number	Description	Box Qty.
78205125583	<b>BPNA</b>	Angle Bracket	100
78205128090	<b>BCH12-PNA</b>	3/4" Cable Hook	100
78205125584	<b>BCH21-PNA</b>	1 <sup>5</sup> / <sub>16</sub> " Cable Hook	50
78205125586	<b>BCH32-PNA</b>	2" Cable Hook	50
78205125588	<b>BCH64-PNA</b>	4" Cable Hook	25
78205125611	<b>BH-PNA</b>	Strap Hanger	100
78205125593	<b>BH1-PNA</b>	#8 Wire or 1/4" Plain Rod	100
78205125596	<b>BH2-PNA</b>	3/8" Plain Rod	100

## Drive Pin Fasteners



BH\_PNA



BG\_PNA



BP\_PNA



BL14\_PNA



BX4\_PNA



BX4M\_PNA


UPC/Part Number	Catalog Number	Description	Box Qty.
78205125604	<b>BH4-PNA *</b>	1/4" Threaded Rod	100
78205125606	<b>BH6-PNA *</b>	3/8" Threaded Rod Cable Hook	100
78205125605	<b>BH5-PNA **</b>	1/4" or 3/8" Threaded Rod	100
78205125613	<b>BG6-PNA ***</b>	3/8" Conduit	100
78205125615	<b>BG8-12-PNA</b>	1/2" & 3/4" Conduit	100
78205125616	<b>BG16-PNA</b>	1" Conduit	100
78205125623	<b>BP8-PNA</b>	1/2" EMT	100
78205125624	<b>BP12-PNA</b>	3/4" EMT	100
78205125630	<b>BP16-PNA</b>	1" EMT	100
78205125620	<b>BL1400-PNA</b>	1/2" Conduit	100
78205125621	<b>BL1410-PNA</b>	3/4" Conduit	100
78205125622	<b>BL1420-PNA</b>	1" Conduit	100
78205125590	<b>BX4-PNA</b>	Single Run MC, AC or FMC	100
78205125591	<b>BX4M-PNA</b>	Double Run MC, AC or FMC	100

\* With threaded impressions. \*\* Nuts required.

\*\*\* BG-6 will accept the following range  $\varnothing.420 - \varnothing.675$ :

14/2 thru 10/4 MC/AC cable and  $5/16$  or  $3/8$  flexible conduit

# Hangers

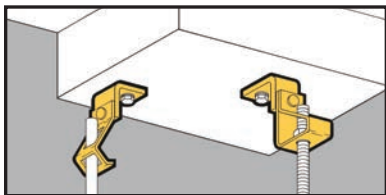

## Angle Bracket Fasteners

- Suspend plain or threaded rod and drop wire from ceilings, walls, concrete beams, joists and laminated wood beams.
- Clearance hole for 1/4" bolt provided.
- Static Load Capacity: 160 Lbs.




UPC/Part Number	Catalog Number	Description	Box Qty.
78101118930	<b>BH1-H7</b>	#8 Wire or 1/4" Plain Rod	100
78101118975	<b>BH2-H7</b>	For 3/8" Plain Rod	100



UPC/Part Number	Catalog Number	Threaded Rod Size	Box Qty.
78101119010	<b>BH4-H7</b>	1/4"-20	100
78101119090	<b>BH6-H7</b>	3/8"-16	100
78101119050	<b>BH5-H7 *</b>	1/4"-20 or 3/8"-16	100

\* Nuts required.

Note: BH4 & BH6 have thread impressions.

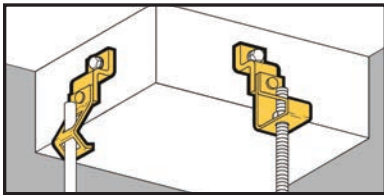

- Suspend plain or threaded rod and drop wire from ceilings, walls, beams, and joists.
- Clearance hole for 1/4" bolt provided.
- Static Load Capacity: 160 Lbs.

## Offset Bracket Fasteners



UPC/Part Number	Catalog Number	Description	Box Qty.
78101118935	<b>BH1-H8</b>	#8 Wire or 1/4" Plain Rod	100
78101118975	<b>BH2-H8</b>	3/8" Plain Rod	100




UPC/Part Number	Catalog Number	Threaded Rod Size	Box Qty.
78101119015	<b>BH4-H8</b>	1/4"-20	100
78101119095	<b>BH6-H8</b>	3/8"-16	100
78101119055	<b>BH5-H8 *</b>	1/4"-20 or 3/8"-16	100

\* Nuts required.

Note: BH4 & BH6 have thread impressions.

# Hangers

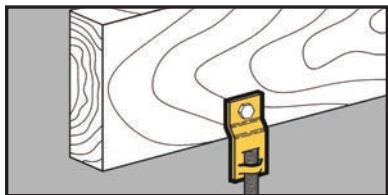


- Suspend 3/8" threaded rod from ceilings, walls, beams, and joists.
- Finish: Zinc Plated
- Static Load Capacity: 610 Lbs.

## Threaded Rod Hangers

.406" Ø



UPC/Part Number	Catalog Number	Description	Box Qty.
78101101661	<b>B3223-3/8</b>	Offset Eye Socket	100

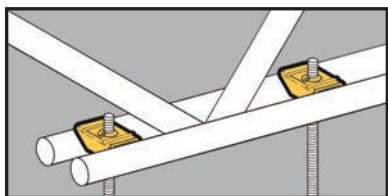


- Allows centering on all open web joists with round bottom chords.
- Static Load Capacity:  
BH11 = 200 Lbs.  
BH12 = 100 Lbs.

## Wedge Hangers



BH11





BH12



UPC/Part Number	Catalog Number	Description	Box Qty.
78101118860	<b>BH11</b>	With 3/8" Clearance Hole	100
78101118865	<b>BH12</b>	With 1/4"-20 Thread Impression	100

# Hangers



- Brackets are easily attached with screws or drive pins to wood, concrete or steel structures.
- Brackets are adaptable for use with a wide variety of fasteners, wires, "S" hooks and hangers.



BD2



BD4



BA28B

UPC/Part Number	Catalog Number	Description	Box Qty.
78101101686	<b>BD2</b>	Flat Bracket	100
78101118280	<b>BD4</b>	Offset Bracket	100
78101101449	<b>BA28B</b>	Angle Bracket	100

Read safety/installation instruction sheets in packages before use.